



L80-6S

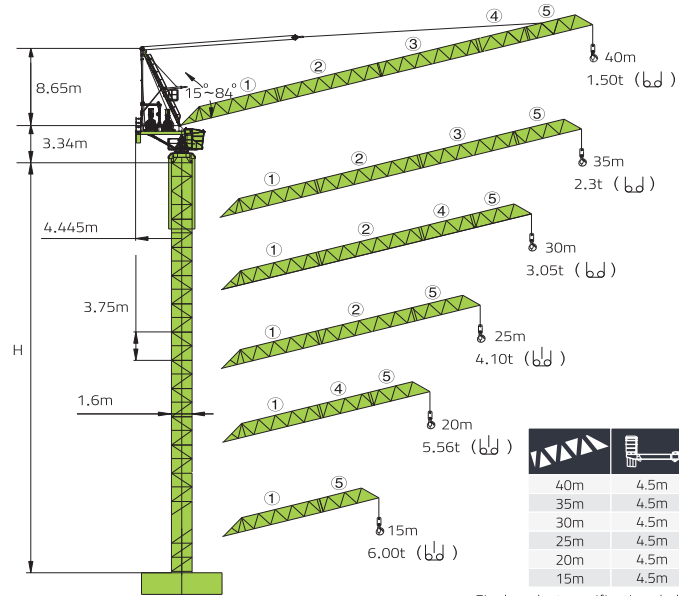


		H	 (kg)	PHZ500	PHZ1300
40m	4.5m	H1	12600	7	7
35m	4.5m	H2	12600	7	7
30m	4.5m	H3	12600	7	7
25m	4.5m	H4	12600	7	7
20m	4.5m	H5	12600	7	7
15m	4.5m	H6	12600	7	7

Final product specification shall be in accordance with purchase order or sales contract only

■ 塔身 Masts / 反力 Reactions

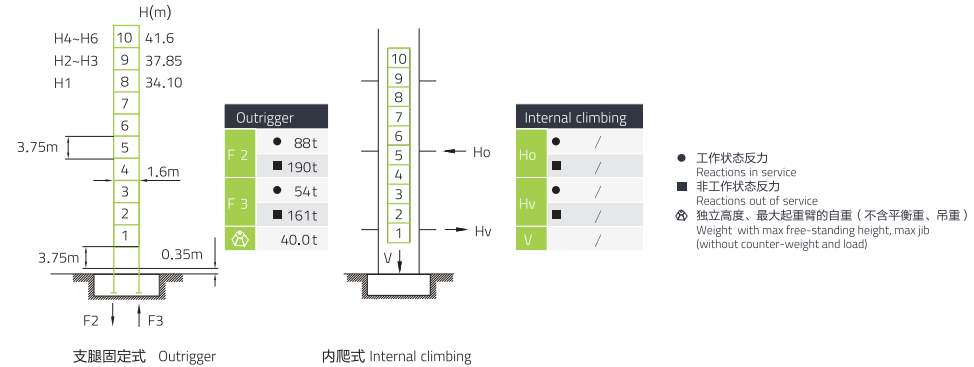


■ 附着 Anchorages (超出咨询我们 Consult us if overtop)

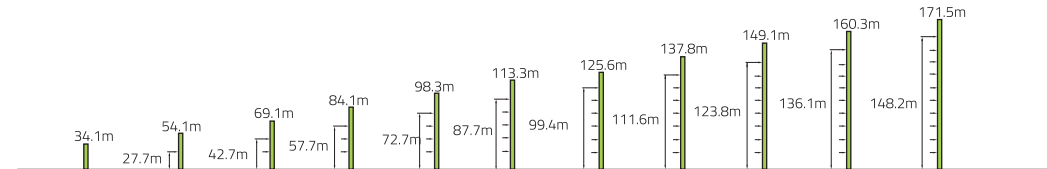

L80-6S

起重臂 Luffing jib

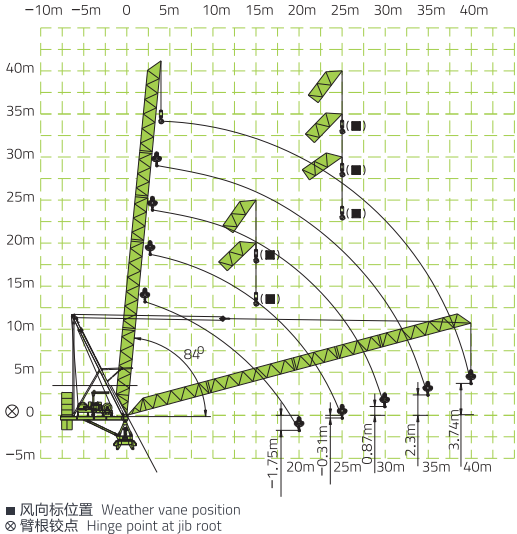

起重特性 Load Diagram

 R(m)		Max Capacity m/t	20	22	25	28	30	32	35	37	40
40 R=40.02		4.40~24.40/4.00	4.00		3.98	3.26	2.87	2.52	2.08	1.83	1.50
		4.40~18.00/6.00	5.60	4.84	3.93	3.22	2.83	2.48	2.05	1.80	1.47
35 R=34.99		3.91~24.89/4.00	4.00			3.38	3.01	2.7	2.3		
		3.91~18.20/6.00	5.65	4.91	4.03	3.34	2.97	2.64	2.23		
30 R=30.26		3.44~25.30/4.00	4.00			3.50	3.10				
		3.44~18.40/6.00	5.73	5.01	4.15	3.48	3.08				
25 R=25.24		2.94~25.00/4.00	4.00								
		2.94~18.60/6.00	5.82	5.13	4.25						
20 R=20.5		2.47~20.00/4.00	4.00								
		2.47~18.80/6.00	5.74								
15 R=15.6		1.97~15.00/4.00	4.00								
		1.97~15.00/6.00	6.00								

L80-6S

起重特性 Load Diagram

配置 configuration									KW	
 起升 Hoisting	H37FL20-460D	m/min	45	90	30	60	—	—	37	460m ① (6 layers)
		t	4	2	6	3	—	—		
 回转 Slewing	HPW55F1.130B HPW55F2.130B	r/min	0~0.8						5.5×2	①超出咨询我们 Consultus if overtop
 变幅 Luffing	L30FL30	min	1.6 (15 °~ 84.5 °)						30	
	380V(±10%)50Hz	78 kW								